



12.7 X 99 MM

NATO FMJ M33 - 42,31 G (653 GR)

12.7 x 99 mm FMJ

The cartridge is NATO and is available with few bullet types. It's available for customer customizable configuration according to individual requirement.

12.7 x 99 mm – FMJ bullet

The FMJ (Full Metal Jacket) bullet weighs 42.31 g (653 gr) and features a lead core for enhanced penetration and stability. The jacket is made of CuZn10, providing the necessary durability to maintain consistent ballistic performance.

12.7 x 99 mm – case

The caliber 5.56 x 45 mm CuZn30 case is intended for inserting the powder charge, primer and bullet.

All data provided are indicative and subject to change.

SPECIFICATIONS

Technical Specification

CARTRIDGE

Caliber	12.7 x 99 mm, NATO
Weight	max 112 g
Length	max 138.4 mm

BULLET GRAIN

Type	FMJ, Ball
Weight	42 g \pm 0.4 g (649 grain)
Length	max 58.6 mm
Material	Jacket - CuZn10; Core - Lead
Extraction	\geq 900 N

CASE

Length	max 99.31 mm
Material	CuZn30

PRIMER

Type	Boxer, non-corrosive, non-toxic
Propellant	Smokeless Powder (Double Base)
Waterproof	Sealant applied

The 12.7x99, NATO, Ball, ammunition producing in ATS AMMO is in compliance with NATO STANAG 4383 requirements. It's comply the the requirements to the NATO manuals AC/225(LG/3-SG/1)D/8 and PFP(NAAG-LCG/1-SG/1)WP(2010)0002. The ammunition can be fired from all NATO nominated 12.7x99 mm weapons: M2 HB BROWNING 12.7mm Machine Gun.

ELECTRONIC PRESSURE AND VELOCITY (KIAG 6215)			
Ammunition Temperature	+21°C ± 2°C		+52°C & -54°C
Velocity (at 24 m, m/s)	V = 890 ± 10 m/s		No requirement
Standard Deviation	≤ 12 m/s		No requirement
Max Corrected Mean Case Mouth Pressure, MPa	XCP +3SD ≤ 450 Mpa		No requirement XCP+3SD ≤ 450 Mpa
Min Corrected Mean Port Pressure, MPa	No requirement		No requirement
Action Time (ms)	No requirement		Max Mean Action Time + 5SD for -54°C sample ≤ 4.5 ms
Muzzle Energy (at 24 m, J)	No requirement		No requirement
Precision (at 550 m)	HSD ≤ 300 mm and VSD ≤ 300 mm		
Function and Casualty	Permissible percentage of defects was not exceeded		
Primer sensitivity critical hight method (run down)	Test ball 225.1 ± 0.57 g	H +5 SD ≤ 380	H - 2 SD ≥ 63
Min Corrected Mean Port Pressure, MPa	XPP - 3SD ≤ 103 Mpa		Max port pressure difference between +52°C/ -54°C and 21°C samples is ± 15 Mpa XPP-3SD ≥ 103 Mpa
Terminal effects at distance 100 m, perforation rolled homogeneous armor plate, mild steel witness screen (500 m behind armor plate)		At least one shall completely perforate 22 mm (Brinell hardness 321–375), and at least one splinter shall perforate the witness screen 1.5mm Mild Steel (S235 JRG2 or HE280M)	
Trajectory match	Horizontal	Vertical	
	550 m ≤ 550 mm	550 m ≤ 385 mm	
	900 m ≤ 900 mm	900 m ≤ 630 mm	
Waterproof test	No more than 15% of the tested rounds have leaks		

Compatibility with: AC/225(LG/3-SG/1)D/8 and PFP(NAAG-LCG/1-SG/1)WP(2010)0002 and STANAG 4383

PACKING	
Makro	1 (one) metal box M2A1: 140 cartridges 1 (one) wooden case for transportation: 2 (two) metal boxes Totally: 280 cartridges in 1 (one) wooden box
Weight (100 rounds)	Net: 11.15 kg
	Gross: 12.00 kg
	NEQ: 1.4 kg
Hazard class	1.4 S
UN Classification	CARTRIDGES, SMALL ARMS

Packaging options are available based on the buyer's request. Cartridges can be supplied in standard outer cartons or, for an additional cost, in metal M2A1 boxes. All shipments are palletized, with boxes and pallets marked according to the customer's specifications.

V = Corrected velocity
XCP = Corrected mean chamber pressure
XPP = Corrected mean Port pressure
HSD = Horizontal standard deviation
VSD = Vertical standard deviation
Mr = Mean radius

Outsourcing Components

ATS® Ammunition has its own top-to-bottom manufacturing of a finished Product, an output of In-house made Machines, and produces 100% In-house Materials, Components and Tooling). ATS AMMO 12.7 x 99 mm components (bullet, case, primer) are perfectly compact, customizable and *available for individual purchase*.

 <small>Case Length: 99 mm</small>	
CASE 12.7 x 99 mm	NATO M33
Unprimed	42.31 g 653 grain
CuZn30	CuZn10 Steel Core

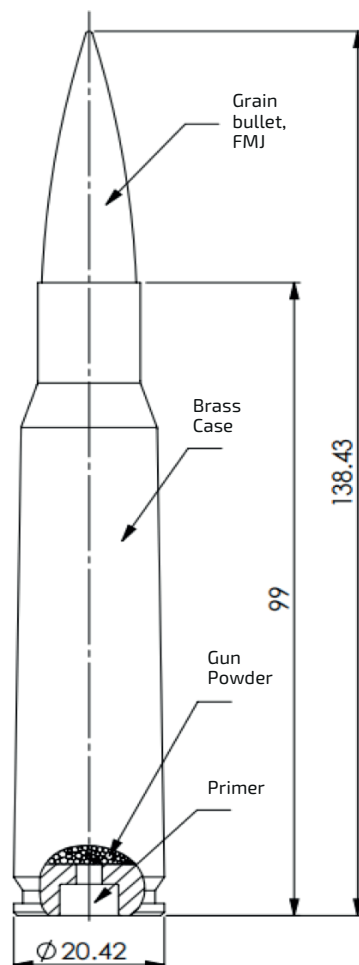


Image: Components Layout (12.7 x 99 mm)
Part number: 1271099